


ENEREADY PRODUCTS LTD.

ENEREADY™ Model 2000 Heat Recovery Ventilator Specifications

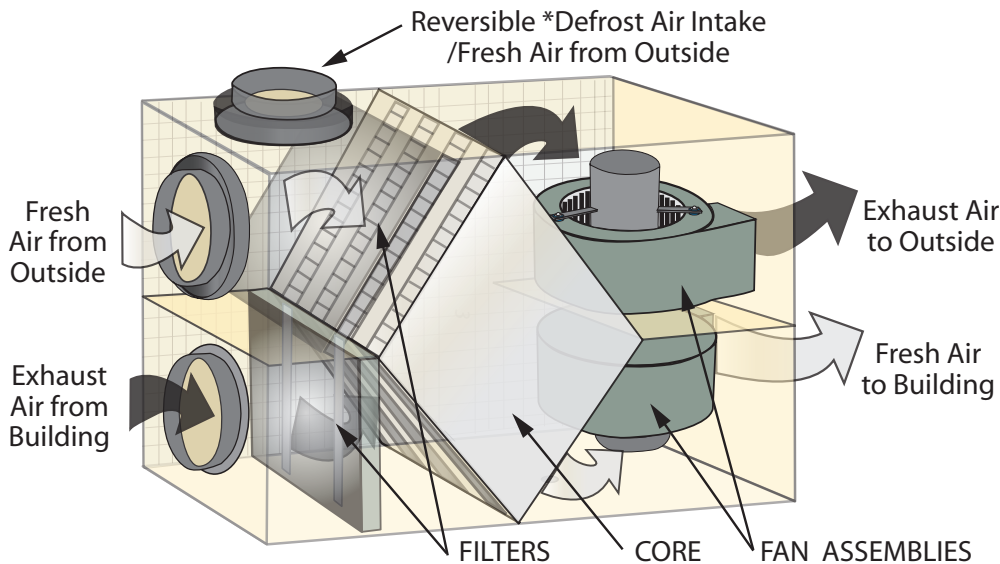

Shipping Information:

23" x 40" x 27" High
Models NP & NPC: 87 lbs.
Model DPC: 90 lbs

Cabinet

- 21"H x 34"W x 17"D
- 20 gauge powder coated steel
- high density, rigid, foil-faced mineral fibre cabinet liner
- isocyanurate door liner with closed cell foam cover

Heat Recovery Core

- proven rugged polypropylene

Filters

- 2 washable foam filters

Fans

- centrifugal wheels
- quiet, oilable, high efficiency PSC motors

Power Supply

- 115 VAC, 50/60 Hz with 3 amp maximum
- 36" long grounded power cord

Low Voltage Wiring

- all models have 24 VAC wiring for remote switching
- models NPC and DPC have 12 VDC for remote switching

Noise and Vibration Isolation

- rubber isolation from motor to fan housing
- reinforced rubber straps isolate cabinet from house
- 12" long flex pieces isolate cabinet from interior duct

Installation Parts

- 1 @ 8' drain hose
- 2 @ 6" drain hose
- 1 "Y" fitting
- 2 drain nipples
- 1 @ Balance Damper
- 2 @ 12" long flex pieces
- 4 @ 18" long hanging straps
- mounting hardware
- installation manual
- homeowner manual

Defrost Option

(*not required in Metro Vancouver, Sunshine Coast, Vancouver Island or Fraser Valley)

- model DPC has time controlled, recirculation air intake activated at -5°C.

Airflow

Collar size: 6"Ø 8"Ø
• Low: 90 cfm 85 cfm
• Med: 120 cfm 140 cfm
• High: 180 cfm 230 cfm

ESP In. W.C. for 6"Ø collars

.1 = 254 cfm	.45 = 182 cfm
.2 = 237 cfm	.5 = 170 cfm
.3 = 216 cfm	.6 = 142 cfm
.4 = 195 cfm	.7 = 112 cfm

Sensible Recovery Efficiency

Airflow	87 cfm	117 cfm
SRE @ 0°C	72 %	70%
SRE @ -25°C	62%	60%

Warranty

- 5 years on parts
- limited lifetime warranty on heat recovery core

Approvals

- certified to Can/CSA STD C22.2 No.113
- conform to UL STD 1812
- approved for use in R-2000 homes